



HD IP IR Bullet Camera

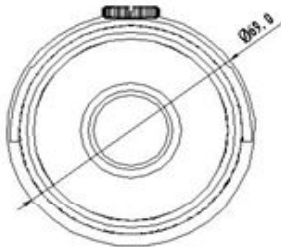

ZPI132/ZPI132P

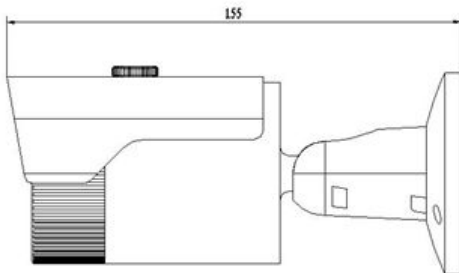

Contour dimension Unit: mm



1-Power Supply 2-network interface

◀ FEATURES ▶

- Economical HD IP IR cylinder camera
- H.264 High Profile/Main Profile/BaseLine Profile
- 1.3 Megapixel full real time recording
- Conforms to ONVIF, Support P2P, UPNP
- Mobilephone, IE, Client Software, Platform Management Software Surveillance
- Snapshot, email sending function, Auto ICR, POE optional, IP66

SPECIFICATIONS

System	
Sensor	1/3"1.3Mega progressive scan CMOS
Min.illumination	Colour:0.01Lux/F1.2; 0Lux/F1.2(IR ON)
Video Parameters	Support WDR, Mirror, WB, 3D Digital Noise Reduction, Sharpness, Brightness, Saturation, Contrast Adjustable
Electronic shutter	Auto(1/25s-1/10000s Adjustable)
Day/Night	Auto/Color / B&W(IR_CUT)
Lens	3.6mm
IR distance	20-30 m
video encoding	H.264 High Profile/Main Profile/BaseLine Profile
record resolution	1280×960, 1280×720, 704×480, 352×240
Dual-stream	Support
Privacy Masking	Four zones for privacy masking
Capture	JPEG capture, capture resolution is the max coding resolution
Motion Detection	Multiple detection zones, variable sensitivity levels
Security Feature	Support password protection
Video bite rate	160-8192 Kbps continuously-adjustable, support VBR/CBR
Data transmission and storage	
Data storage type	Record(video), picture file
Storage	Manual, Auto(Scheduled, motion detection, alarm)
Protocol/Network function	TCP/IP, UDP, HTTP, DHCP, RTP/RTSP, DNS, DDNS, FTP, NTP, PPPOE, UPNP, SMTP, SNMP, P2P, UPNP
Web Browser	IE, Safari, Chrome, Firefox, etc.
Mobile Surveillance	Iphone, Andriod
Interface	
Network interface	RJ45 10M/100M adaptive Ethernet interface
Reset Button	Front Reset Button
POE function	N/A Support
Power	DC 12V
Environment	
Operation temp./humidity	-10℃- +60℃/10%-90%
Protection grade	IP66
Power supply	≤5.5W
Dimensions	62*62*155(mm)
Weight	530g